



ENVIRONMENTAL HOUSINGS

MODELS CCH2212
CCH2212-H24 - WITH HEATER


- COMPACT
- EASY TO INSTALL AND SERVICE
- AVAILABLE WITH HEATER AND SUNSHIELD
- WEATHERPROOF

VELTEK's Environmental Housings, Series CCH2212 are weather-proof, environmental compact housings designed for smaller outdoor CCTV applications. This series was designed to provide easy access through the spring cover and latch. The weatherproof seal protects the camera and lens assembly from moisture. This series is available in two models: CCH2212 and CCH2212-H24.


In addition to our basic Model CCH2212, we offer Model CCH2212-H24, which is designed and equipped with a thermostatically-controlled strip heater that provides 25 watts of power, goes on when the temperature drops to 50°F (10°C) and turns off when the temperature rises to 60°F (16°C).

Model CCH2212-H24's sunshield provides long-term protection from UV radiation and corrosion. The viewing window is made from polycarbonate Lexan® for long lasting transparency.

MODEL CCH2212

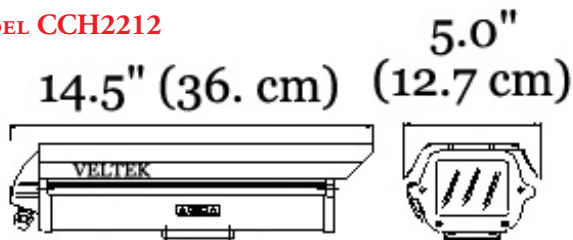

MODEL CCH2212-H24

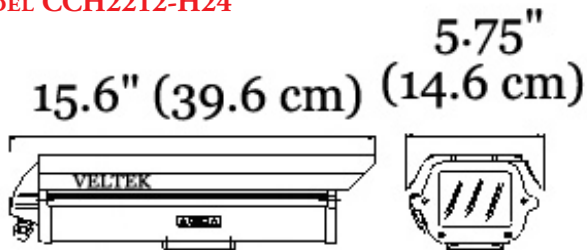

SPECIFICATIONS

ELECTRICAL: CCH2212-H24

INPUT VOLTAGE/AMPS	24 VAC	
POWER CONSUMPTION	25W	
HEAT EQUIVALENT	Screw terminal strip	
TRANSFORMER	A 24-VAC transformer is provided for camera power in 120 and 230 VAC units.	
HEATER THERMOSTAT	CLOSES	68°F (20°C)
	OPEN	80°F (27°C)

OPERATIONAL

CAMERA PLATFORM	Adjustable fore and aft
-----------------	-------------------------

MECHANICAL

	MODEL	CCH2212	CCH2212-H24
EXTERNAL DIMENSIONS	LENGTH	14.5" (36.8 cm)	15.6" (39.6 cm)
	WIDTH	5.0" (12.7 cm)	5.75" (14.6 cm)
	HEIGHT	4.5" (11.4 cm) - including connectors	
	WEIGHT	3.1 lbs. (1.4 kg)	4.1 lbs. (1.9 kg)
MAXIMUM CAMERA/ LENS DIMENSIONS	LENGTH	9.0" (22.9 cm)	
	WIDTH	3.5" (8.9 cm)	
	HEIGHT	3.0" (7.6 cm)	
CONSTRUCTION	HOUSING	Aluminum, painted light gray	
	WINDOW	0.125" (0.32 cm) thick clear Lexan® polycarbonate	
CLEAR WINDOW AREA		2.7"W x 2.6"H (7.0 cm W x 6.6 cm H)	
CABLE ACCESS		Two liquid tight compression fittings located at bottom of rear base	
CAMERA ACCESS		One latch on back of housing, spring hinge cover	
HOUSING MOUNTING		Three ¼-20 tapped holes provided on bottom for mounting and balancing (two screws must be used).	

ENVIRONMENTAL

CCH2212-H24 AMBIENT TEMPERATURE RANGE	-30°F to 120°F (-35°C to 49°C)
STORAGE TEMPERATURE RANGE	-40°F to 150°F (-40°C to 65°C)
STORAGE HUMIDITY	Up to 90% relative, noncondensing
MOISTURE	Rainproof elastomer seals and gaskets
WIND RESISTANCE	Up to 80 mph (130 kph)

Specifications subject to change without notice

Lexan is a registered trademark of General Electric Corp.